

Förstudie Biosfärområde Nämdöskärgården

Helena Strömberg
Projektledare





SIMRAD ER60 - Local - [Normal]
Operation View Options Install Output Window Help



Interval


0.33

Channel: GPT 38 kHz 00907206R0d 1-1 ES38B

Mode: Active



Sv 20Lo
-34dB


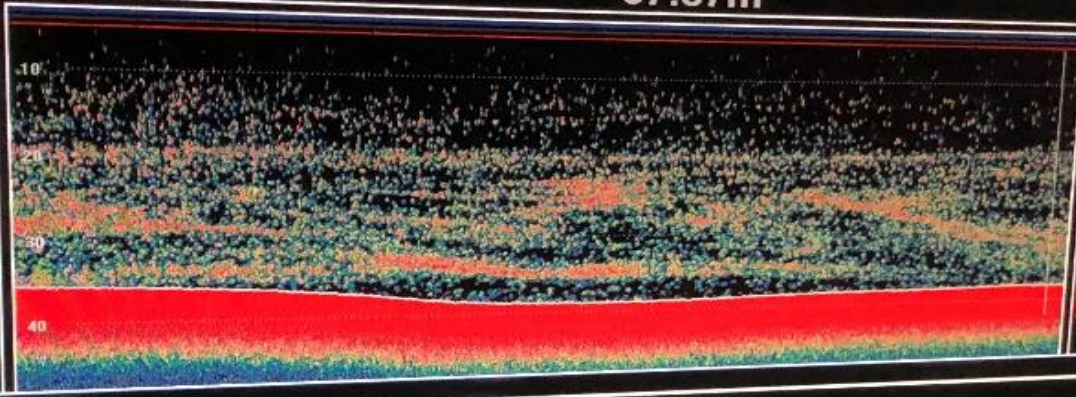


Transducer ES38B
Frequency: 38000Hz
Beamwidth: Split Depth: 1.0m
Gain: 24.7dB, 0.0 Con: 0.0dB
2-way beam angle: 20.0deg
Angle: Targeting Along 0.0°, Along 0.0°, Along 0.0°
Angle Offset: Along 0.0°, Along 0.0°, Along 0.0°
2-dB Beam width: Along 0.0°, Along 0.0°, Along 0.0°
Transceiver Active 1-1
Pulse duration: 0.12 ms, Sample interval: 0.001s
Power: 200W, Receiver bandwidth: 1.00kHz
Environment
Sound speed: 1480m/s, Altitude: 0.00m
Depth: 37.87m
Max ping range: 200m
Active Region: Layer 1
Active area
Min range: 0.0 m
Max range: 40.0 m
Min 20dB range: 0.0 m
Min 10 dB range: 0.0 m
Max 10 dB range: 40.0 m
Max 10 dB range: 40.0 m
Ping rate: 1.0 Hz
Ping: 0.000000

GPT 120 kHz 00907206R0d 2-1 ES120-7C



Sv 20Lo
-34dB

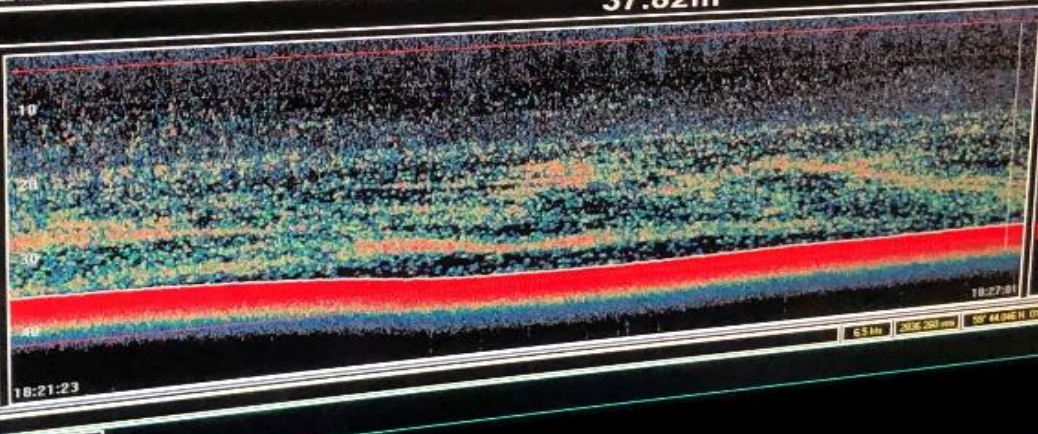

Transducer ES120-7C
Frequency: 120000Hz
Beamwidth: Split Depth: 1.0m
Gain: 20.0dB, 0.0 Con: 0.0dB
2-way beam angle: 21.0deg
Angle: Targeting Along 0.0°, Along 0.0°, Along 0.0°
Angle Offset: Along 0.0°, Along 0.0°, Along 0.0°
2-dB Beam width: Along 0.0°, Along 0.0°, Along 0.0°
Transceiver Active 2-1
Pulse duration: 0.12 ms, Sample interval: 0.001s
Power: 200W, Receiver bandwidth: 1.00kHz
Environment
Sound speed: 1480m/s, Altitude: 0.00m
Depth: 37.82m
Max ping range: 200m
Active Region: Layer 1
Active area
Min range: 0.0 m
Max range: 40.0 m
Min 20dB range: 0.0 m
Min 10 dB range: 0.0 m
Max 10 dB range: 40.0 m
Max 10 dB range: 40.0 m
Ping rate: 1.0 Hz
Ping: 0.000000















Tillsammans kan vi påverka hur vårt Nämdöskärgårdens samhälle ska
blomstra hållbart.

Fantasi, idéer och samverkan!



Tack!

E-post: helena.stromberg@slu.se

